

LCG63


Unità di centraggio pneumatica standard CNOMO, singola asta



L	C	G	6	3	0	5	0	U	1	2	R
1	2	3	4		5	6		7			

1 Serie LC = Unità di centraggio standard CNOMO	2 Versione G = Pneumatica, singola asta	3 Taglia 50 = Ø 50 mm
4 Corse 025 = 25 mm 050 = 50 mm	5 Sensore di posizione U = Sensore elettronico	6 Ø interno asta 12 = Ø 12 mm 20 = Ø 20 mm
7 Raschiastelo R = Raschiastelo metallico		


Retractable locating pin unit

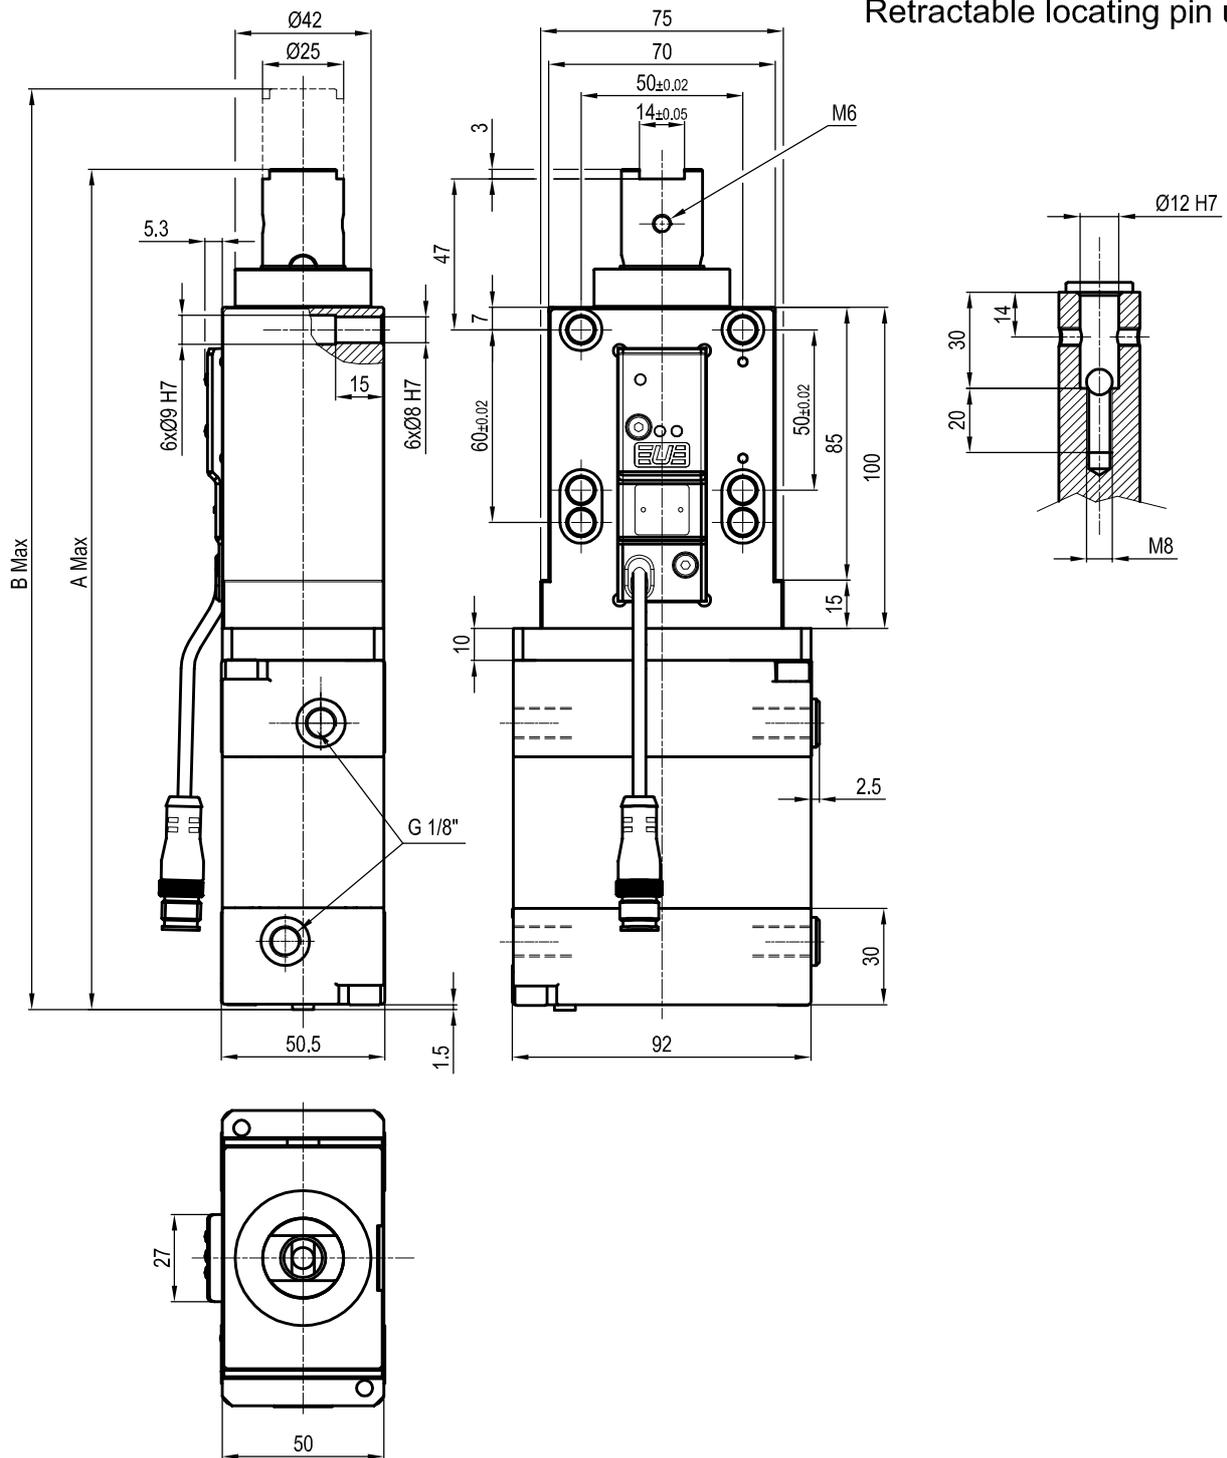

ROD'S INNER Ø12				
CYLINDER Ø	STROKE	WEIGHT	A	B
CYLINDER Ø63	25 mm	2,4 Kg	265 mm	290 mm
CYLINDER Ø63	50 mm	2,5 Kg	290 mm	340 mm

Min./max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ± 45° C**
 Electronic sensor with M12
 Supply voltage: 10÷30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

Retractable locating pin unit

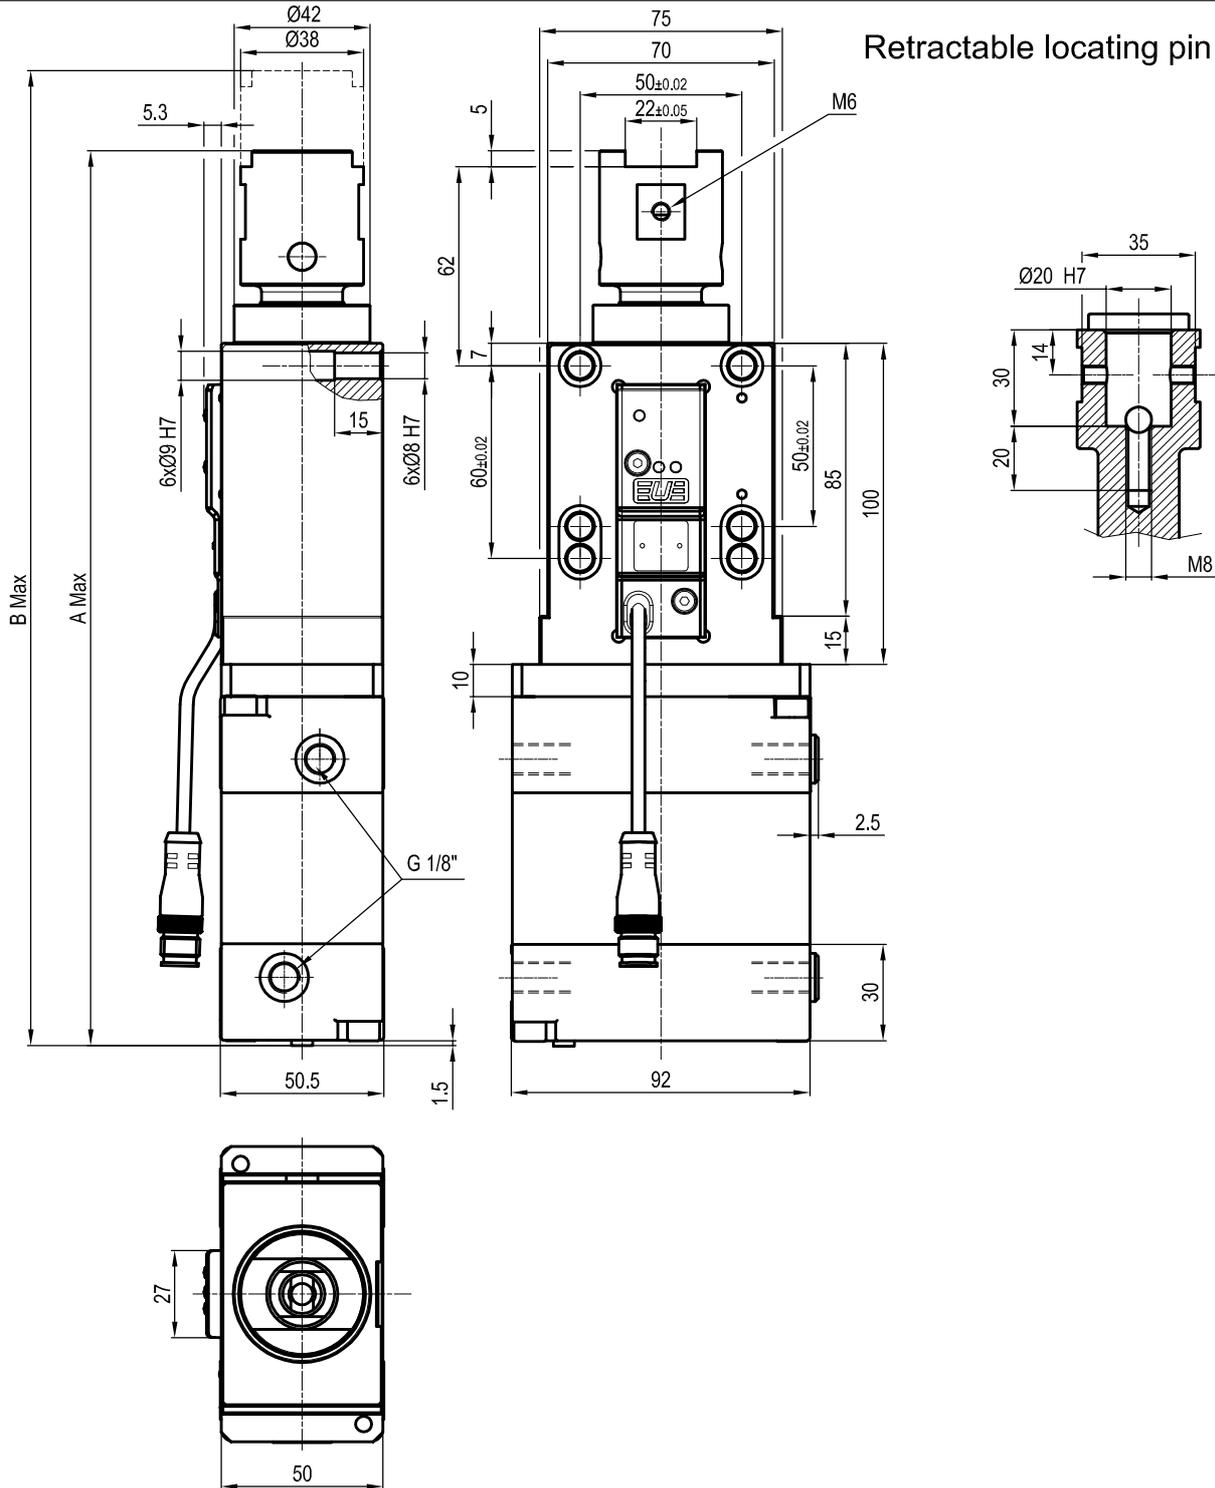

ROD'S INNER $\varnothing 20$				
CYLINDER \varnothing	STROKE	WEIGHT	A	B
CYLINDER $\varnothing 63$	25 mm	2.4 Kg	280 mm	305 mm
CYLINDER $\varnothing 63$	50 mm	2.5 Kg	305 mm	355 mm

Min./max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ± 45° C**
 Electronic sensor with M12
 Supply voltage: 10÷30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides