

LCB32

Unità di centraggio pneumatica,
 sensore posteriore, fissaggi standard UNIVER,
 singola asta, doppia guida



L	C	B	3	2	0	4	0	E	A	E	R
1	2	3	4		5	6	7	8			

1 Serie	2 Versione	3 Taglia
----------------	-------------------	-----------------

LC = Unità di centraggio

B = Pneumatica, sensore posteriore,
 fissaggi standard UNIVER,
 singola asta, doppia guida

32 = Ø 32 mm

4 Corse	5 Sensore di posizione	6 Terminale asta
----------------	-------------------------------	-------------------------

020 = 20 mm
 040 = 40 mm

N = Senza sensore
 (con piastra di chiusura)
 E = Sensore elettronico con connettore
 M12 orientabile (DF-U)

A = Asta per centraggi dislocati
 B = Asta con impronta a chiavetta
 C = Asta con impronta a chiavetta a croce,
 Ø interno 16 mm
 E = Asta con impronta chiavetta a croce,
 Ø interno 10 mm

7 Orientamento asta	8 Raschiastelo
----------------------------	-----------------------

E = Est, standard



O = Ovest



N = Nord




S = Sud



R = Raschiastelo metallico

Solo con terminale asta A

UNIVERSAL Pneumatic retractable locating pin unit

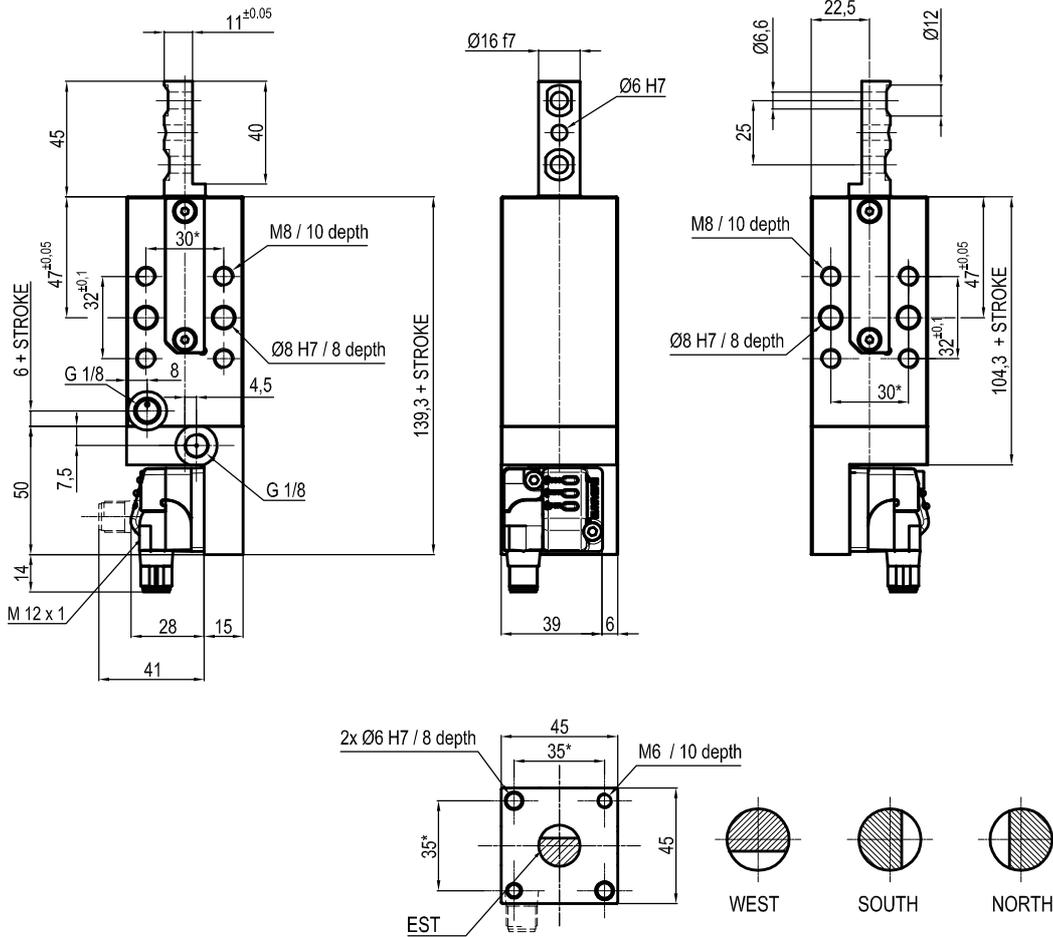


Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06*	5.5 Nm ±0.03*	1.0 Kg

Min./max. operating pressure: 0,4 / 0,6 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

UNIVERSAL Pneumatic retractable locating pin unit

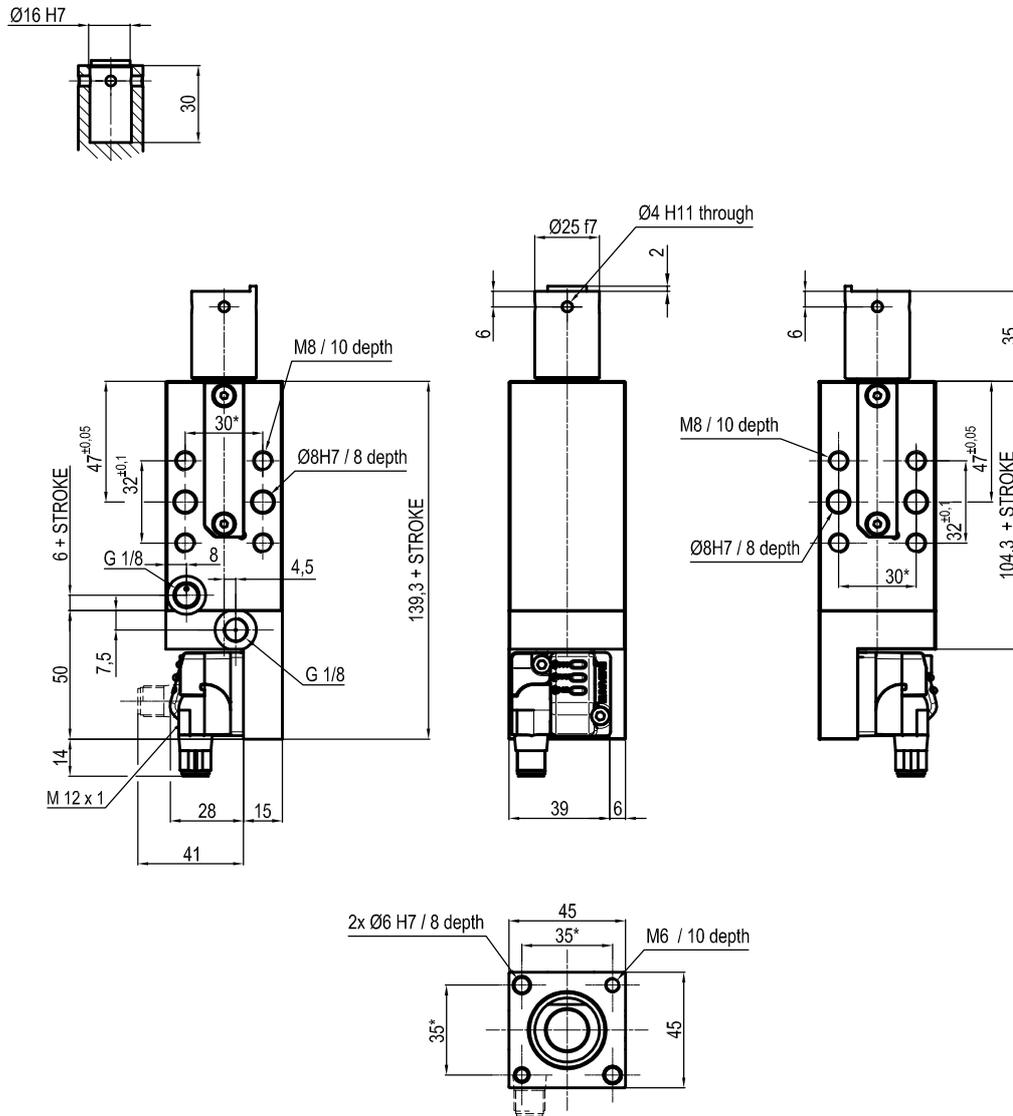


Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06*	5.5 Nm ±0.03*	1.0 Kg

Min./max. operating pressure: 0,4 / 0,6 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

UNIVERSAL Pneumatic retractable locating pin unit

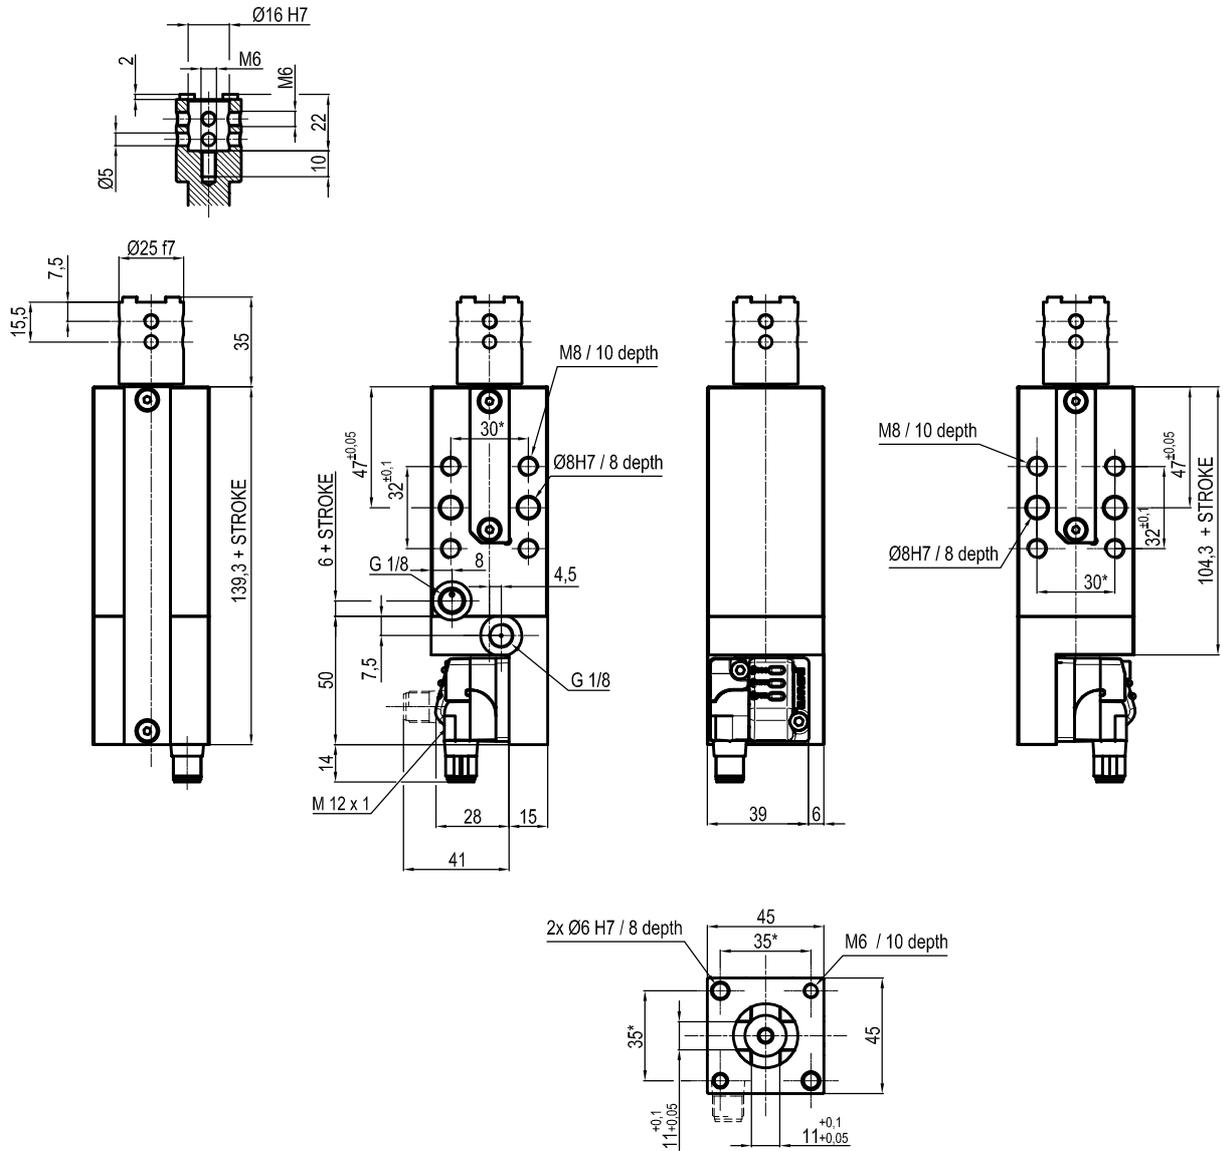


Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06°	5.5 Nm ±0.03°	1.0 Kg

Min./max. operating pressure: 0,4 / 0,6 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

UNIVERSAL Pneumatic retractable locating pin unit

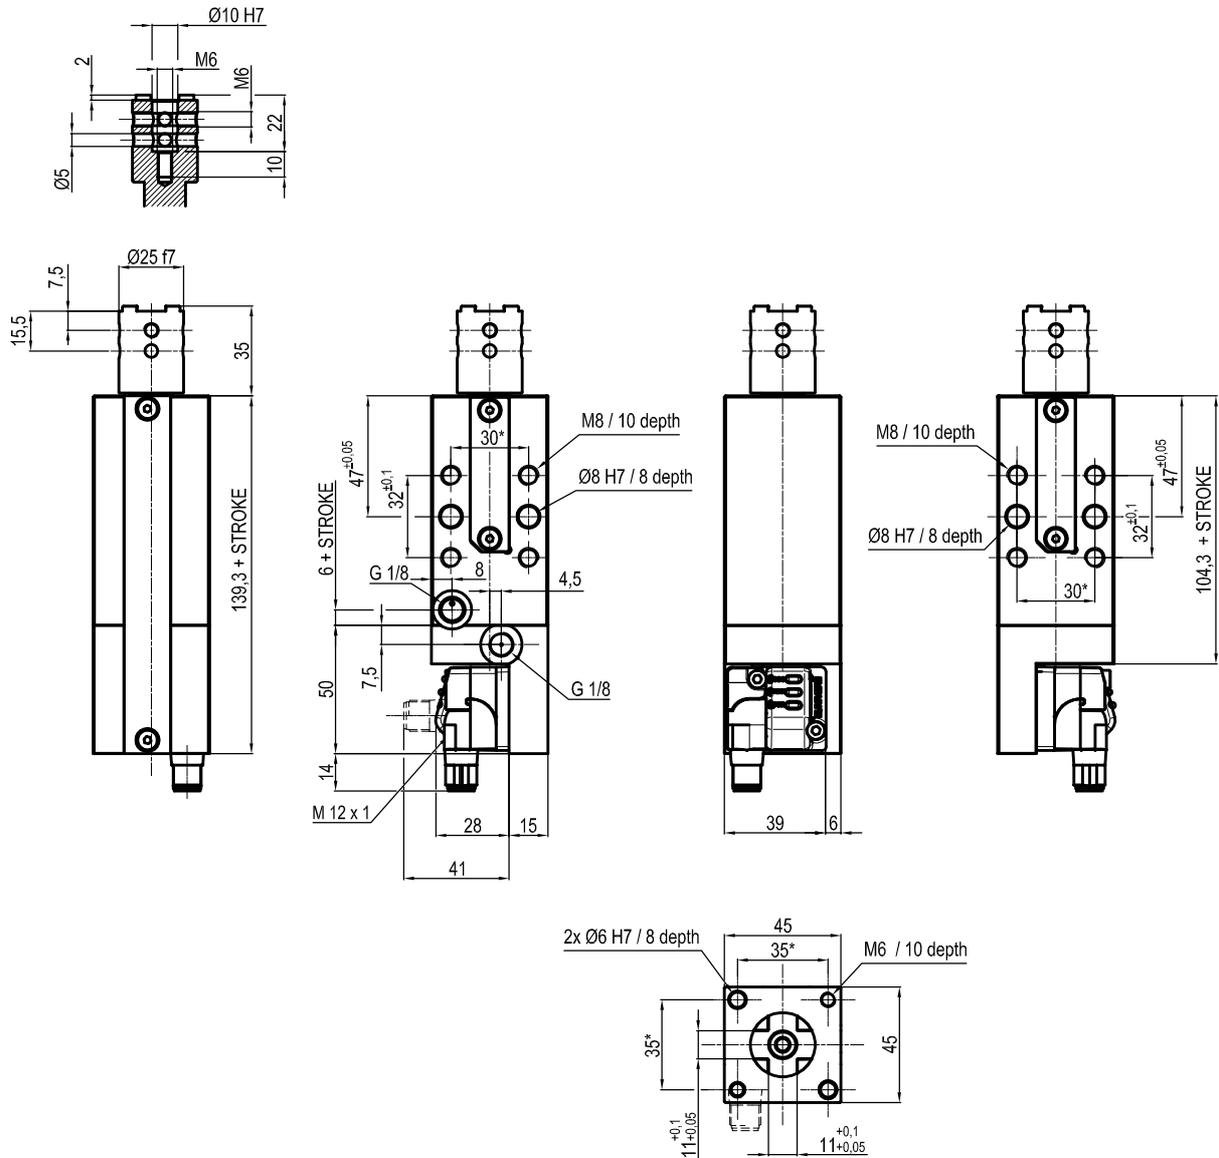

Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06*	5.5 Nm ±0.03*	1.0 Kg

Min./max. operating pressure: 0,4 / 0,6 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.